





FLOATING CLAMPS

Produced of polyethylene and filled with polyurethane.
 Usage for pipeline laying operations ensuring positive buoyancy.
 Consists of 2 pieces being combined with hot dipped galvanized or stainless steel flanges, bolts and nuts.

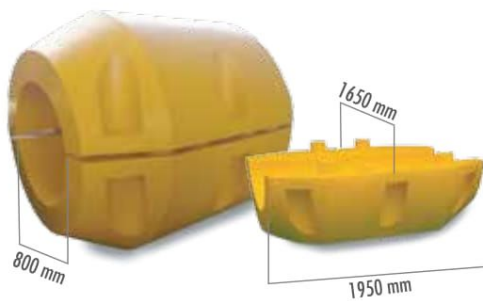

M03580
 2580 LT
 Buoyancy: 2320 kg

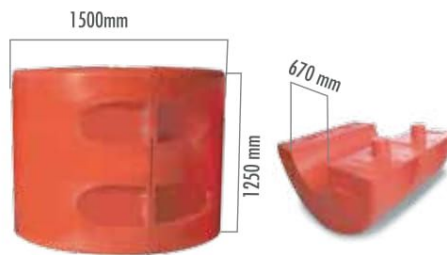


M03567
 1700 LT
 Buoyancy: 1530 kg




M03545
 500 LT
 Buoyancy: 450 kg



M03550
 430 LT
 Buoyancy: 387 kg

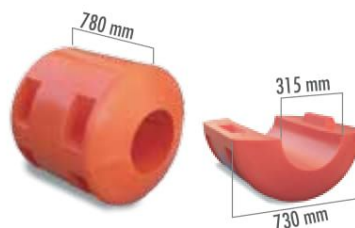

M03532
 176 LT
 Buoyancy: 160 kg

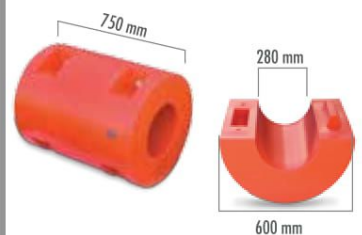

M03528
 120 LT
 Buoyancy: 108 kg

